

Zen



Zen



Beju 8x48



Beju Inlay 32x32




Gure 8x48



Gure Inlay 32x32



Shiro 8x48

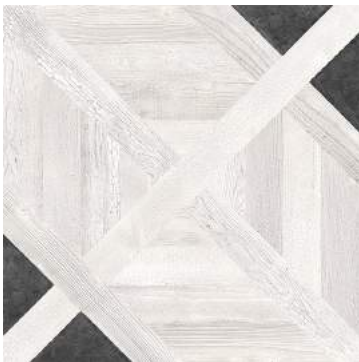

Shiro Inlay 32x32



Kuro 8x48



Kuro Inlay 32x32


Zen

Available Sizes









8x48 Field Tile



32x32 Inlay Field Tile



Technical Data

CARATTERISTICHE TECNICHE Technical Features - Caractéristiques Techniques - Technische Eigenschaften Técnicas Eigenschaffen - Características Técnicas - Технические Характеристики	NORMA Standard - Norme Norm - Norma - Norma	VALORI Value - Valeur Vorgabe - Valor - Средние
 PLANARITÀ Flatness Planéité Ebenflächigkeit Planaridad Плоскостность	UNI EN ISO 10545/2 ASTM C485 CALIBRATED ± 0,75% (MAX ± 0,09 in) ASTM C485 RECTIFIED ± 0,40% (MAX ± 0,05 IN-SIZE ≤ 60 cm) (MAX ± 0,07 IN-SIZE > 60 cm)	± 0,26% / ± 1,5 mm - ± 0,25%
 ASSORBIMENTO D'ACQUA (VALORE MEDIO IN %) Water absorption (Average value expressed in %) - Absorption d'eau (Valeur moyenne en %) Wasser Aufnahme (Durchschnittswert in %) - Absorcion de agua (Valor medio en %) Поглощение воды	UNI EN ISO 10545/3 ± 0,5 % ASTM C373	CONFORME COMPLIANT
 RESISTENZA ALLA FLESSIONE Modulus of rupture - Resistance a la flexion - Biegefestigkeit Resistencia a la flexion - Прочность на изгиб	UNI EN ISO 10545/4	≥ 50 N/mm ²
 FORZA DI ROTTURA Breaking strength - Resistance à la rupture - Bruchlast - Resistencia a la rotura - Разрывное усилие	UNI EN ISO 10545/4 ASTM C648	≥ 2000 N 250 Lbs
 RESISTENZA AL GELO Frost resistance - Résistance au gel - Frostbeständigkeit Resistencia a las heladas - Морозостойкость	UNI EN ISO 10545/12 ASTM C1026	CONFORME UNAFFECTED
 RESISTENZA CHIMICA AD ALTE E BASSE CONCENTRAZIONI DI ACIDI E BASI Chemical resistance to high and low acid and basic concentrations Résistance chimique aux hautes et basses concentrations d'acides et de bases Chemikalienfestigkeit bei hohen und niedrigen Konzentrationen von Säuren und Basen Resistencia química con concentraciones altas y bajas de ácidos y bases Химическая стойкость к высоким и низким концентрациям кислот и щелочей	UNI EN ISO 10545/13 ASTM C-650 .	GA - GLA - GHA UNAFFECTED
 RESISTENZA ALLE MACCHIE Stain resistance - Résistance aux taches - Fleckenbeständigkeit Resistencia a las manchas - Стойкость к образованию пятен	UNI EN ISO 10545/14 CTI 81-7D	5 NO EVIDENT VARIATION
 COEFFICIENTE DI ATTRITO Slip resistance Coefficient de glissement Rutschfestigkeit Barfußbereich Coeficiente de atrito medio Кoeffициент трения	DIN 51130 DIN 51097 ANSI A 137.1 - 2012 DCCOF (Section 9.6) B.C.R.A. AS 4586: 2013 Slip resistance classification of new pedestrian surface materials BS 7976-2: 2002 Pendulum testers EN 12633:2006 Method of determination of unpolished and polished slip/ skid resistance value	R9 - WET ≥ 0,42 ≥ 0,40 - - -