

KEYSTONE

COLLECTION



Wayne Tile
Company

waynetile.com



ANTHRACITE



FLOOR - WHITE

WALL - GREY




GREY



MULTICOLOR

Keystone

STOCK ITEMS

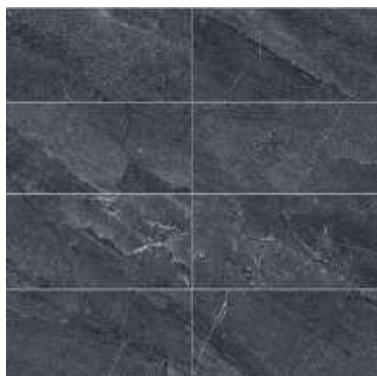

Anthracite
 24"x48"
 12"x24"
 4"x12"
 Hexagon Mosaic
 2x2 Mosaic
 3x12 Bullnose



Grey
 24"x48"
 12"x24"
 4"x12"
 Hexagon Mosaic
 2x2 Mosaic
 3x12 Bullnose



Multicolor
 24"x48"
 12"x24"
 4"x12"
 Hexagon Mosaic
 2x2 Mosaic
 3x12 Bullnose



White
 24"x48"
 12"x24"
 4"x12"
 Hexagon Mosaic
 2x2 Mosaic
 3x12 Bullnose

DECORS



MOSAICO
 36 PZ.
 (5x5)
30,2x30,2
 12"x12"
 NATURALE
 NATURAL
 NATUREL
 NATUR
 WHITE
 GREY
 MULTICOLOR
 ANTHRACITE
12,04



MOSAICO
 RUBINO
 18 PZ.
30,2x30,2
 12"x12"
 NATURALE
 NATURAL
 NATUREL
 NATUR
 WHITE
 GREY
 MULTICOLOR
 ANTHRACITE
17,59



MOSAICO
 ESAGONI
30,2x30,2
 12"x12"
 NATURALE
 NATURAL
 NATUREL
 NATUR
 WHITE
 GREY
 MULTICOLOR
 ANTHRACITE
22,53




TRIM



BATTISCOPA
7,5x60
 3"x24"
 RETTIFICATO
 RECTIFIED
 RECTIFIE
 REKTIFIZERT
 WHITE
 GREY
 MULTICOLOR
 ANTHRACITE
7,41

Keystone

Special Order Items

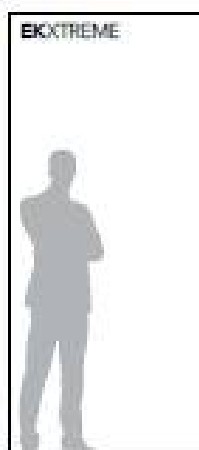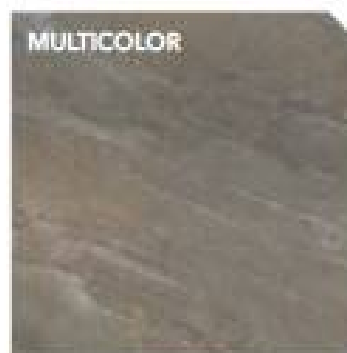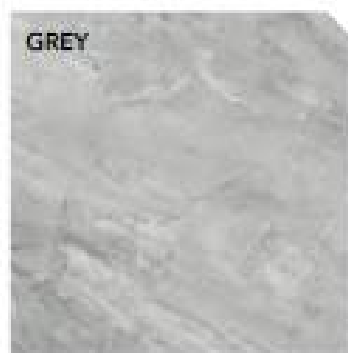

120x270
48"x106"


6 mm

RETTIFICATO
RECTIFIED
RECTIFIÉ
REKTIFIZIERT

R10

WHITE
GREY
MULTICOLOR
ANTHRACITE

74,07



80x180
32"x71"


9 mm

RETTIFICATO
RECTIFIED
RECTIFIÉ
REKTIFIZIERT

R10

WHITE
GREY
MULTICOLOR
ANTHRACITE

61,73



60x60
24"x24"

9 mm

RETTIFICATO
RECTIFIED
RECTIFIÉ
REKTIFIZIERT

R10

WHITE
GREY
MULTICOLOR
ANTHRACITE

29,32

TRIM



BATTISCOPA

6,5x120
2"^{1/2}x48"

RETTIFICATO
RECTIFIED
RECTIFIÉ
REKTIFIZIERT

WHITE
GREY
MULTICOLOR
ANTHRACITE

18,52

KEYSTONE

TECHNICAL DATA

CARATTERISTICHE TECNICHE Technical Characteristics / Caractéristiques Techniques			
SERIE: KEYSTONE			
CLASSIFICAZIONE Classification/Classification/Klassifizierung	UNI EN 14411 / ISO 13006	App. G B I a / Annex G B I a	
LUNGHEZZA E LARGHEZZA Length and width/Longueur et largeur/Länge und Breite	EN ISO 10545/2	CONFORME In accordance conforme	
ORTOGONALITÀ Wedging/Orthogonalité/Rechtwinkeligkeit			
SPESSORE Thickness/Epaisseur/Dicke			
RETTILINEITÀ DEI LATI Linearity/Rectitude/Geradheit der Kanten			
PLANARITÀ Warpage/Planéité/Ebenflächigkeit			
ASPETTO Aspect/Appearance/Aspekt			
ASSORBIMENTO D'ACQUA Water absorption/Absorption d'eau/Wasseraufnahme	EN ISO 10545/3	≤0,5%	Valore massimo singolo 0,6%
MODULO DI ROTTURA Modul of ropture/ Module de rupture/ Bruchlast	EN ISO 10545/4	≥35 N/mm ²	Valore singolo minimo 32
SFORZO DI ROTTURA Breaking strength/Résistance à la rupture/ Bruchkraft		≥1300 N	
DETERMINAZIONE DELLA RESISTENZA ALL'URTO Determination of impact resistance/Résistance aux chocs/Schlagfestigkeit	EN ISO 10545/5	0,84	
RESISTENZA ALL'ABRASIONE PROFONDA Abrasion resistance/Résistance à l'abrasion/Widerstand Tiefenverschleiss	EN ISO 10545/6	<175 mm ³	
COEFFICIENTE DI DILATAZIONE TERMICA LINEARE Thermal expansion coefficient/Coefficient de dilatation thermique/Ausdehnungskoeffizient	EN ISO 10545/8	6,5 x 10 ⁻⁶ /°C	
RESISTENZA ALLO SCIVOLAMENTO Slip resistance/Résistance à la glissance/Trittsicherheit Gewerbebereich /Trittsicherheit Barfussbereich	DIN 51130	R10	
	DIN 51097	A	
	C.o.F B.C.R./D.M. 236 14/6/89/	μ>0,40	
	ANSI DCOF A137.1- 2012	>0,42	
RESISTENZA AGLI SBALZI TERMICI Thermal shock resistance/Résistance au choc thermique/Temperaturwechselbeständigkeit	EN ISO 10545/9	RESISTENTI Resistant Résistant Bestaendig	
DETERMINAZIONE DELLA DILATAZIONE DOVUTA ALL'UMIDITA' Determination of moisture expansion/Dilatation due à l'humidité/Dilatation Feuchtigkeit	EN ISO 10545/10	0,1 mm/m	
RESISTENZA AL GELO Frost resistance/Résistance au gel/Frostsicherheit	EN ISO 10545/12	RESISTENTI Resistant Résistant Bestaendig	
RESISTENZA AGLI AGENTI CHIMICI: Resistance to chemicals/Résistance aux acides et aux bases/Säure- und Laugenbeständigkeit	EN ISO 10545/13	Min class B	
RESISTENZA ALLE MACCHIE Resistance to staining/Résistance au tachage/ Fleckenbeständigkeit	EN ISO 10545/14	Min class 3	
RESISTENZA AL FUOCO Fire resistance /Résistance au feu / Brandverhalten	UNI EN ISO 13501/1	Classe A1- A1 _{fl}	