

ULTRA SLATE

COLLECTION



Wayne Tile
Company

waynetile.com



MID GREY



ANTHRACITE



DARK GREY



IVORY




FLOOR - DARK GREY

WALL - IVORY

Ultra Slate

STOCK ITEMS

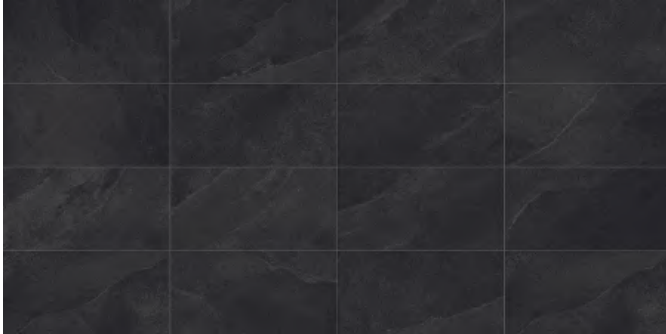

Anthracite

3x12

12x24

24x24


3x24 Bullnose

Herringbone Mosaic

Hexagon Mosaic



2" Hexagon Mosaic
Available In All Colors

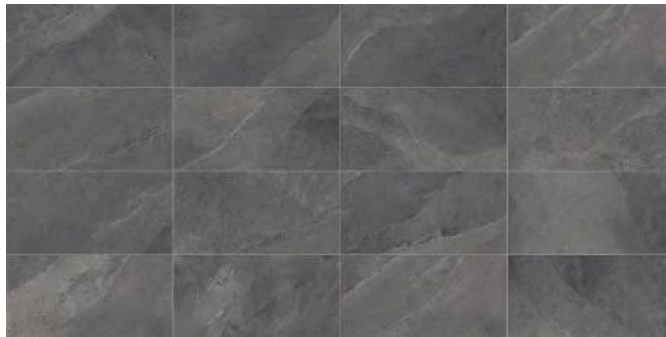

Dark Grey

3x12

12x24

24x24


3x24 Bullnose

Herringbone Mosaic

Hexagon Mosaic



1x3" Herringbone
Mosaic Available In
All Colors

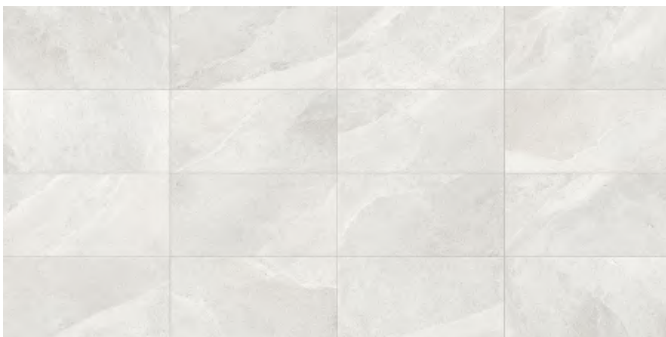

Ivory

3x12

12x24

24x24

3x24 Bullnose

Herringbone Mosaic

Hexagon Mosaic



Mid Grey

3x12

12x24

24x24

3x24 Bullnose

Herringbone Mosaic

Hexagon Mosaic

ULTRA SLATE

SPECIAL ORDER ITEMS

ivory



M5W9 61,0x122,2 cm 24"x48" **R** **A180**

M6W5 30,8x61,5 cm 12"x24" OUTDOOR **N** **A141**

FP2
M7W0 61,0x122 cm 24"x48" FP2 **RS** **A184**

mid grey



M6W2 61,0x122,2 cm 24"x48" **R** **A180**

M6W7 30,8x61,5 cm 12"x24" OUTDOOR **N** **A141**

FP2
M7W1 61,0x122 cm 24"x48" FP2 **RS** **A184**

dark grey



M6W3 61,0x122,2 cm 24"x48" **R** **A180**

M6W8 30,8x61,5 cm 12"x24" OUTDOOR **N** **A141**

FP2
M7W2 61,0x122 cm 24"x48" FP2 **RS** **A184**

anthracite



M6W4 61,0x122,2 cm 24"x48" **R** **A180**

M6W9 30,8x61,5 cm 12"x24" OUTDOOR **N** **A141**

FP2
M7W4 61,0x122 cm 24"x48" FP2 **RS** **A184**

SLASH


Decor / Decors / Décors / Dekors

mosaico monocolore 36 tessere 5x5 - 30x30 cm 12"x12" **P71**


ivory




mid grey



dark grey



anthracite



mosaico asimmetrico 18 pz - 30x30 cm 12"x12" **P77**


ivory



mid grey




dark grey



anthracite



Special Pieces



ivory



dark grey




anthracite



mid grey
elemento "L" monolitico outdoor
15x61x4 cm 6"x24"x13 3/4" **P51**

ivory
mid grey
dark grey
anthracite



step
30,4x61,0 cm R 12"x24" R **P90**



gradino costa retta
34x122,2x4 cm R 13"x48"x13 3/4" R **P32**
34x61,0x4 cm R 13"x24"x13 3/4" R **P31**



vista frontale
angolare costa retta dx/sx
34x122,2x4 cm R 13"x48"x13 3/4" R **P41**
34x34x4 cm R 13"x13"x13 3/4" R **P40**

ivory
mid grey
dark grey
anthracite

ivory
mid grey
dark grey
anthracite

ivory
mid grey
dark grey
anthracite


ULTRA SLATE

ULTRA SLATE

2 CM OUTDOOR PAVERS**

COLORS

ivory mid grey dark grey anthracite




RS Rettificato/Strutturato Rectified/Textured

Sizes / Formats



61,0x122 cm RS .
24"x48" RS



tutti i colori . all colors .
toutes les couleurs . alle Farben

IVORY, MID GREY FP2 | 61,0x122 cm RS_24"x48" RS
elemento a L 61,0x122x5 cm RS_24"x48"x2" RS
griglia, griglia angolo 20x122 cm RS_8"x48" RS

MID GREY FP2 | 61,0x122 cm RS_24"x48" RS

ivory



M7W0 | 61,0x122 cm 24"x48" FP2

mid grey



M7W1 | 61,0x122 cm 24"x48" FP2

dark grey



M7W2 | 61,0x122 cm 24"x48" FP2

anthracite



M7W4 | 61,0x122 cm 24"x48" FP2

FP2 Pezzi Speciali / Special Pieces / Pièces Spéciales / Formteile



ivory
mid grey
dark grey
anthracite

ivory
mid grey
dark grey
anthracite

ivory
mid grey
dark grey
anthracite

ivory
mid grey
dark grey
anthracite

round lineare 30x122 cm 12"x48" RS P125

ivory
mid grey
dark grey
anthracite

round angolare 30x122 cm 12"x48" RS P126 COPPA

angolo SX

angolo DX

ivory
mid grey
dark grey
anthracite

angolo bordo toro 30x122 cm 12"x48" RS P127

angolo SX

angolo DX

ivory
mid grey
dark grey
anthracite

Note - The special pieces FP2 are sold by piece and only on request (minimum delivery time 20 working days from date of order).



**Indicates Special Order Item

ULTRA SLATE

TECHNICAL DATA

ULTRA SLATE

The information contained in this catalogue is as accurate as possible, but cannot be considered as legally binding. The Company reserves the right to make any modifications that become necessary due to production requirements. Weight, colours and dimensions are subject to the inevitable variations typical of the ceramic firing process. Colours and aesthetic effects shown on this catalogue should be considered indicative and approximate as a result of printing process limits. Possible variations may occur and can not be at the base of any claim.

CARATTERISTICHE TECNICHE TECHNICAL CHARACTERISTICS CARACTÉRISTIQUES TECHNIQUES TECHNISCHE MERKMALE		NORMA DI RIFERIMENTO REFERENCE STANDARD NORME DE REFERENCE PRÜFMETHODE		VALORE RICHIESTO REQUIRED VALUE VALEUR REQUISE SOLLWERT		VALORE MEDIO TUSCANIA AV. TUSCANIA VALUE VALEUR MOYENNE TUSCANIA MITTLERER TUSCANIA-WERT	
	DIMENSIONI DIMENSIONS DIMENSIONS ABMESSUNGEN	ISO 10545-2		CONFORME COMPLIANT CONFORME KONFORM		CONFORME COMPLIANT CONFORME KONFORM	
	ASSORBIMENTO D'ACQUA WATER ABSORPTION ABSORPTION D'EAU WASSERAUFNAHME	ISO 10545-3		≤ 0,5 %		CONFORME COMPLIANT CONFORME KONFORM	
	RESISTENZA A FLESSIONE MODULUS OF RUPTURE RESISTANCE A LA FLEXION BIEGEFESTIGKEIT	ISO 10545-4		MODULUS OF RUPTURE R ≥35 N/MM ² BREAKING STRENGTH S ≥1300 N		CONFORME COMPLIANT CONFORME KONFORM	
	RESISTENZA ALL'ABRASIONE ABRASION RESISTANCE RÉSISTANCE À L'ABRASION ABRIEBBESTÄNDIGKEIT	ISO 10545-7		PEI SOLO PER PIASTRELLE SMALTATE ONLY FOR GLAZED TILES			
	DILATAZIONE TERMICA LINEARE LINEAR THERMAL EXPANSION DILATATION THERMIQUE LINEAIRE LINEARE WÄRMEAUDEHNUNG	ISO 10545-8		=< 9x10 ⁻⁵ °C ⁻¹		CONFORME COMPLIANT CONFORME KONFORM	
	RESISTENZA AGLI SBALZI TERMICI THERMAL SHOCK RESISTANCE RESISTANCE AUX ECARTS DE TEMPERATURE TEMPERATURWECHSELBESTÄNDIGKEIT	ISO 10545-9		RESISTENTE RESISTANT RESISTANT BESTÄNDIG		RESISTENTE RESISTANT RESISTANT BESTÄNDIG	
	RESISTENZA AL GELO FROST RESISTANCE RESISTANCE AU GEL FROSTBESTÄNDIGKEIT	ISO 10545-12		RESISTENTE RESISTANT RESISTANT BESTÄNDIG		RESISTENTE RESISTANT RESISTANT BESTÄNDIG	
	RESISTENZA AGLI ACIDI ED ALLE BASI ACID AND ALKALI RESISTANCE RESISTANCE AUX ACIDES ET AUX BASES SÄURE- UND LAUGENBESTÄNDIGKEIT	ISO 10545-13		CLASS GB MIN.		LOW CONCENTRATION GLA HIGH CONCENTRATION GHA	
	RESISTENZA ALL'ATTACCO CHIMICO CHEMICAL RESISTANCE RESISTANCE À L'ATTAQUE CHEMIQUE CHEMISCHE BESTÄNDIGKEIT	ISO 10545-13		CLASS GB MIN.		GA	
	RESISTENZA ALLE MACCHIE STAIN RESISTANCE RESISTANCE AU TACHES FLECKENBESTÄNDIGKEIT	ISO 10545-14		CLASS 3 MIN.		5	
	COEFFICIENTE DI ATTRITO (SCIVOLOSITÀ) FRICTION COEFFICIENT (SLIPPERINESS) COEFFICIENT DE FRICTION (GLISSEMENT) REIBUNGSKOEFFIZIENT (RUTSCHIGKEIT)	BCR - ITALIA DM DEL 14-06-89		ASTM - USA ASTM C1028		DIN - GERMANIA DIN 51130	
		DRY RUBBER	WET RUBBER	DRY LEATHER	DRY NEOLYTHE	WET NEOLYTHE	R10 - R11 outdoor - R12 A+B+C FP2 ZH 1/571
		0,62	0,51	0,62	0,69	0,62	

THE PRODUCTS HAVING AN ABSORPTION < 0,5% ARE CLASSIFIED ACCORDING THE UNI CEN STANDARDS "FULLY VITRIFIED TILES" AND ACCORDING TO THE ASTM STANDARDS "IMPERVIOUS TILES"