

# GLOW

---

# COLLECTION



Wayne Tile  
Company

[waynetile.com](http://waynetile.com)

**GLAZE**

**RADIANCE**



SPIKE

GLAZE





**SPIKE**




**GLAZE**




# Glow

## Available Items

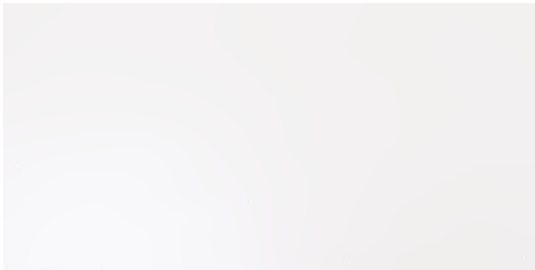


Luxit Nacar 12"x24"

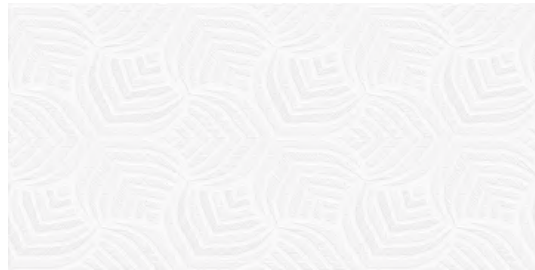

Spike Blanco 12"x24"



Radiance Blanco  
12"x24"

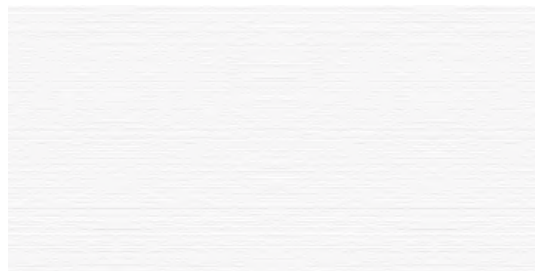

Glaze Blanco 12"x24"

## Technical Data

### Ceramic Wall Tile

TECHNICAL CHARACTERISTICS / CARACTERÍSTICAS TÉCNICAS / CARACTÉRISTIQUES TECHNIQUES  
[UNE-EN-14411]

Group BIII Anex. L  
WHITE BODY/PASTA BLANCA/PÂTE BLANCHE

STANDARDS NORMA / NORME	FEATURES CARACTERÍSTICAS / CARACTÉRISTIQUES	RESULT OF TEST RESULTADO DEL ENSAYO / RÉSULTATS DE L'ESSAIE
UNE-EN ISO 10545-3	Water Absorption/Absorción de agua/Absorption de l'eau	Eb > 10 %
UNE-EN ISO 10545-4	Breaking strength/Fuerza de rotura/Charge de rupture en flexion	Min. 1000 N
UNE-EN ISO 10545-5	Bending strength/Resistencia a la flexión/Résistance à la flexion	Min. 15 N/mm <sup>2</sup>
UNE-EN ISO 10545-6	Resistance to deep abrasion/Resistencia a la abrasión profunda/Résistance à l'abrasion profonde	-
UNE-EN ISO 10545-9	Thermal shock resistance/Resistencia al choque térmico/Résistance au choc thermique	-
UNE-EN ISO 10545-11	Resistance to crazing/Resistencia al cuarteo/Résistance au craquèlement	Complies/Cumple/Remplis
UNE-EN ISO 10545-12	Frost resistance/Resistencia a la helada/Résistance au gel	-
UNE-EN ISO 10545-13	Chemical resistance/Resistencia al ataque químico/Résistance à l'attaque chimique	Min. GB/GLB/GHB
UNE-EN ISO 10545-14	Resistance to staining/Resistencia a las manchas/Résistance aux tâches	Min. Clase 3